60854 U.S. PTO
08/796752
02/06/97

Docket No.: 614.1804/HJS

Box PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

NEW APPLICATION TRANSMITTAL

Dear Sir:

Transmitted herewith for filing is the [**xx**] utility
[ ] design patent application of inventor(s):
Koji ARAI

Entitled:

COMMUNICATION METHOD AND APPARATUS FOR A RADIO LOCAL AREA NETWORK SYSTEM USING MACRODIVERSITY

Enclosed are:

1. The Papers Required For Filing Under 37 C.F.R. §1.53(b):

25	Page(s) of Specification
7	Page(s) of Claims
1	Page(s) of Abstract
13	Sheet(s) of [**xx**] formal [ ] informal drawings

2. [**xx**] Combined Declaration/Power of Attorney

3. [**xx**] An Assignment of the invention to:

FUJITSU LIMITED

4. Claim for Priority Under 35 U.S.C. §120

[ ] The benefit under 35 U.S.C. §120 is hereby claimed from the following United States application(s):

5. Claim for Priority Under 35 U.S.C. §119

[**xx**] The benefit of priority under 35 U.S.C. §119 is hereby claimed from the following foreign application(s):

Japanese Patent Application No. 8-189423
Filed: July 18, 1996

[**xx**] A certified copy of (each of) the above-identified foreign application(s) is enclosed.

6. Fee Calculation

CLAIMS AS FILED

	Number Filed		Number Extra		Rate	Basic Fee $ 770.00
Total Claims	12	-20=	0	X	$ 22.00	0.00
Independent Claims	5	- 3=	2	X	$ 80.00	160.00
Multiple dependent claim(s), if any				[ ]	$ 260.00	0.00
					Filing Fee Calculation	$ 930.00

*If the difference is less than zero, enter "0"

[ ] Amendment cancelling extra claims enclosed

[ ] Amendment deleting multiple dependencies enclosed

7. Small Entity Statement

[ ] A verified statement that this is a filing by a "small entity" under 37 C.F.R. §§ 1.9 and 1.27 is attached.
Filing Fee Calculation (50% of above) $

8. Fee Payment

[ ] Not Enclosed

[ ] No filing fee is to be paid at this time.

[xx] Enclosed

[xx] Filing fee calculation above $ 930.00

[xx] Recording assignment ($40.00; 37 CFR §1.21(h)(1)) $ 40.00

Total fees enclosed $ 970.00

9. Method of Payment of Fees

[xx] Check in the amount of $970.00

[ ] Charge Deposit Account No. 19-3935 in the amount of: $
A duplicate of this transmittal is attached.

10. Other Enclosures

11. Authorization to Credit Overpayment or Charge Additional Fees

[xx] The Commissioner is hereby authorized to credit any overpayment, or charge fees under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (application processing fees) which may be required, to Deposit Account 19-3935.

12. Correspondence Address:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

Telephone: (202) 434-1500
Facsimile: (202) 434-1501

Respectfully submitted,

STAAS & HALSEY

By: _____
H. J. Staas
Registration No. 22,010

Date: February 6, 1997

09356152 - 020697

08/956,752 "02/05/97

SPECIFICATION

TO ALL WHOM IT MAY CONCERN:

BE IT KNOWN THAT I, Koji Arai, a citizen of Japan residing at Kawasaki-shi, Kanagawa, Japan have invented certain new and useful improvements in

COMMUNICATION METHOD AND APPARATUS FOR A RADIO LOCAL AREA NETWORK SYSTEM USING MACRODIVERSITY

of which the following is a specification : -

13 930-101 60854 U.S. PTO 08/796752 02/06/97

TITLE OF THE INVENTION

COMMUNICATION METHOD AND APPARATUS FOR A RADIO LOCAL AREA NETWORK SYSTEM USING MACRODIVERSITY

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention generally relates to a communication method and apparatus for a radio local area network (LAN) system, and more particularly, to a communication method and apparatus for a radio local area network (LAN) system, in which transmission performance may be improved by macrodiversity using a plurality of radio base stations.

2. Description of the Related Art

Recently, in a radio LAN system using a millimeter-wave band (for example, 30 GHz to 60 GHz), a very broad band transmission (for example, more than 100-Mbps bit rate) is developing. In this case, taking millimeter-wave transmission performance into account, communication between a transmit unit and a receive unit needs to be a line-of-sight communication.

However, for example, in a radio LAN system used in an office, a radio transmission path between the transmit unit and the receive unit may be interrupted by person's motion or movement of people. In this case, a communication signal is also interrupted and may not be transmitted. To prevent the above-discussed interruption to the communication signal, macrodiversity is proposed.

FIG. 1 shows a configuration example of a prior-art radio LAN system using macrodiversity. In the prior-art radio LAN system using macrodiversity, inside the office, for a single terminal station connected to at least one terminal unit, a plurality of radio base stations (for example, base stations 1

960205.960205

to n) are provided. A signal transmitted from a wiring LAN system is transmitted to the plurality of radio base stations through a HUB (an apparatus for branching a network) in an asynchronous transfer mode (ATM). Then, from the plurality of radio base stations, the signals are simultaneously transmitted to the terminal station on different frequencies (f1 to fn).

When the terminal station receives the signals transmitted from the plurality of radio base stations, the terminal station selects an optimum one (for example, a signal having a highest level) of the received signals, and demodulates a selected signal. In this way, by providing a plurality of transmission paths between a transmit side and a receive side, influence due to the above-discussed interruption to the transmission signal may be prevented. In this case, it is noted that to provide the radio LAN system shown in FIG. 1, for all of the transmission paths, substantially the same desired C/N (a ratio of energy of a modulated carrier signal to noise energy) ratio is required.

However, the following problem occurs in the above-discussed prior-art radio LAN system.

As previously discussed, in the radio LAN system, broad band transmission having a transmission rate of more than 100 Mbps is developing. In the prior-art radio LAN system shown in FIG. 1, to realize broad band transmission or more than 100-Mbps transmission rate, it is necessary for all of the transmission paths to achieve substantially the same desired C/N ratio at a transmission rate of more than 100 Mbps. In order to satisfy the above-discussed conditions, for all of the radio base stations, excessive transmit power is required, and antenna gain of all the radio base stations and the terminal station needs to be further increased.

0755525 0026567

Further, in the prior-art radio LAN system, a number of carriers corresponding to a number of radio base stations is required. Therefore, a broad transmission frequency band is required for the number of radio base stations, and, thus, efficient use of frequencies may be degraded.

SUMMARY OF THE INVENTION

It is an object of the present invention to provide a communication method and apparatus for a radio LAN system using a macrodiversity function. In the method and apparatus, a broad band transmission may be provided with relatively low transmit power, relatively low antenna gain, and a relatively narrower transmission frequency band. This permits the disadvantages described above to be eliminated.

The object described above is achieved by a communication method for a radio LAN system having a communication at a first transmission rate, the method comprising the steps of: (a) time-divisionally distributing a first signal of the first transmission rate into n-1 second signals (n = 3, 4, ...); (b) respectively converting the n-1 second signals into n-1 third signals of a second transmission rate less than the first transmission rate; and (c) transmitting the n-1 third signals of the second transmission rate through radio transmission paths between n-1 radio base stations and a terminal station connected to at least one terminal unit.

The object described above is also achieved by the method mentioned above, wherein the second transmission rate is 1/(n-1) of the first transmission rate.

The object described above is also achieved by a communication apparatus for a radio LAN system which provides communication at a first transmission rate, the apparatus comprising: a rate-conversion-and-

09/955,952 - 020502

distribution circuit for time-divisionally distributing a first signal of the first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting the n-1 second signals into n-1 third signals of a second transmission rate less than the first transmission rate; and n-1 radio base stations transmitting the n-1 third signals of the second transmission rate to a terminal station connected to at least one terminal unit through radio transmission paths.

The object described above is also achieved by the apparatus mentioned above, wherein the second transmission rate is 1/(n-1) of the first transmission rate.

The object described above is also achieved by a terminal station used in a radio LAN system having a rate-conversion-and-distribution circuit for time-divisionally distributing a first signal of a first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting the n-1 second signals into n-1 third signals of a second transmission rate less than the first transmission rate, and n-1 radio base stations transmitting the n-1 third signals of the second transmission rate to the terminal station connected to at least one terminal unit through radio transmission paths, the terminal station comprising: a receiver receiving the third signals of the second transmission rate transmitted from the n-1 radio base stations; and a rate-conversion-and-multiplex circuit for converting and multiplexing received third signals of the second transmission rate into signals of the first transmission rate.

According to the above-discussed method for the radio LAN system, apparatus for the radio LAN system, and terminal station used in the radio LAN system, a fast transmission rate signal is converted

09/959,350 PCT/JP00/02659

to a lower transmission rate signal, and the lower transmission rate signal is transmitted through radio transmission paths from a plurality of radio base stations to the terminal station. Therefore, under the same transmit power from the radio base stations, a ratio of a modulated signal to noise (C/N) of the lower transmission rate signal may be larger than that of the fast transmission rate signal.

Namely, in order to obtain a desired C/N, using the lower transmission rate signal, the transmit power of the radio base station may be reduced, and also, antenna gain of the radio base station and the terminal station may be reduced. As a result, power consumption of the radio LAN system may be reduced. Further, a relatively simplified antenna is applicable for the radio LAN system.

The object described above is also achieved by the method mentioned above, wherein: the radio LAN system further comprises at least one redundant radio base station n; and the method further comprises the steps of: (d) transmitting a fourth signal through a radio transmission path between the terminal station and the at least one redundant radio base station n, data of the fourth signal having a given relationship with data in signals transmitted between at least k ($k \leq (n-1)$) radio base stations of the n-1 radio base stations and the terminal station; and (e) compensating, when at least one transmission path between the at least k radio base stations and the terminal station is interrupted, data of the signal to be transmitted through an interrupted transmission path based on the data of the fourth signal transmitted between the at least one redundant radio base station n and the terminal station.

The object described above is also achieved by the method mentioned above, wherein the given relationship in the step (d) is that the data of the

fourth signal transmitted between the at least one redundant radio base station n and the terminal station is a summation of data of the signals transmitted between the at least k radio base stations and the terminal station for each given time slot.

The object described above is also achieved by the method mentioned above, wherein: the radio LAN system further comprises at least one redundant radio base station n; and the method further comprises the steps of: (f) monitoring interruption of transmission paths between the n-1 radio base stations and the terminal station; and (g) compensating, when one of the transmission paths is interrupted, data of an interrupted transmission path by transmitting the data of the interrupted transmission path between the at least one redundant radio base station n and the terminal station.

The object described above is also achieved by the apparatus mentioned above, further comprising: at least one summation circuit for generating a fourth signal by summing data of at least k ($k \leq (n-1)$) signals of the n-1 third signals of the second transmission rate for every timeslot; and at least one redundant radio base station n transmitting the fourth signal generated in the at least one summation circuit to the terminal station.

The object described above is also achieved by the apparatus mentioned above, further comprising: at least one redundant radio base station n transmitting a signal to the terminal station; a line monitoring circuit for monitoring interruption of transmission paths between the n-1 radio base stations and the terminal station; and a switching circuit, when at least one of the transmission paths is interrupted, for forwarding a signal to be transmitted through an interrupted transmission path to the at least one redundant radio base station n.

0970752-020597

The object described above is also achieved by a terminal station used in a radio LAN system having a rate-conversion-and-distribution circuit for time-divisionally distributing a first signal of a first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting the n-1 second signals into n-1 third signals of a second transmission rate less than the first transmission rate, n-1 radio base stations transmitting the n-1 third signals of the second transmission rate to the terminal station connected to at least one terminal unit through radio transmission paths, at least one first summation circuit for generating a fourth signal by summing data of at least k ($k \leq (n-1)$) signals of the n-1 third signals of the second transmission rate for every timeslot, and at least one redundant radio base station n transmitting the fourth signal generated in the at least one first summation circuit to the terminal station, the terminal station comprising: a receiver receiving the third signals of the second transmission rate transmitted from the n-1 radio base stations; a rate-conversion-and-multiplex circuit for converting and multiplexing received third signals of the second transmission rate into signals of the first transmission rate; a line monitoring circuit for monitoring interruption of transmission paths between the n-1 radio base stations and the terminal station; at least one second summation circuit, when at least one of the transmission paths is interrupted, for generating a fifth signal by summing every timeslot data of at least k signals of signals transmitted from the n-1 radio base stations except for a signal to be transmitted through an interrupted transmission path; at least one subtraction circuit for generating subtraction data between data of the signal transmitted from the redundant radio base station n and data of the fifth signal generated in the second

0859558-020699

summation circuit; and a switching circuit for providing the subtraction data generated in the subtraction circuit to the rate-conversion-and-multiplex circuit instead of providing data of an interrupted signal detected in the monitoring circuit; wherein even if at least one of signals transmitted from the n-1 radio base stations is interrupted, data of the interrupted signal is compensated.

The object described above is also achieved by a terminal station used in a radio LAN system having a rate-conversion-and-distribution circuit for time-divisionally distributing a first signal of a first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting the n-1 second signals into n-1 third signals of a second transmission rate less than the first transmission rate, n-1 radio base stations transmitting the n-1 third signals of the second transmission rate to the terminal station connected to at least one terminal unit through radio transmission paths, at least one redundant radio base station n transmitting a signal to the terminal station, a first line monitoring circuit for monitoring interruption of transmission paths between the n-1 radio base stations and the terminal station and a first switching circuit when at least one of the transmission paths is interrupted, for forwarding a signal to be transmitted through an interrupted transmission path to the at least one redundant radio base station n; the terminal station comprising: a receiver receiving the third signals of the second transmission rate transmitted from the n-1 radio base stations; a rate-conversion-and-multiplex circuit for converting and multiplexing received third signals of the second transmission rate into signals of the first transmission rate; a second line monitoring circuit for monitoring interruption of transmission paths between the n-1 radio base stations

0050595-0050595

and the terminal station; and a second switching circuit, when at least one of the transmission paths is interrupted, for providing the signal transmitted from the redundant radio base station to the rate-conversion-and-multiplex circuit instead of providing a signal to be transmitted through an interrupted transmission path; wherein even if at least one of signals transmitted from the n-1 radio base stations is interrupted, data of the interrupted signal is compensated.

According to the above-discussed method for the radio LAN system, the apparatus for the radio LAN system, and the terminal station used in the radio LAN system, in order to establish a fast data communication, the lower transmission rate data is transmitted through a plurality of radio transmission paths. Further, an additional redundant radio transmission path is provided, and the data in the interrupted transmission path is compensated.

Therefore, the transmit power and the antenna gain in the radio LAN system may be reduced, and also, a compensating function of the data of the interrupted transmission path may be obtained. As a result, a higher-rate-(broad band) data-transmission radio LAN system may be realized.

Further, since a required frequency band for transmission between the respective radio base stations and the terminal station may be reduced, even if taking a frequency band required for the redundant radio base station into account, usage frequency band for the radio LAN system may be significantly reduced.

Particularly, in the above-discussed specified system, the signal to be transmitted through the interrupted transmission path may be flexibly allocated to the redundant radio transmission path. Therefore, even when the transmission paths, a number thereof being the same as a number of the redundant

0965952-020697

radio transmission paths, are interrupted, signal data of the interrupted transmission paths may be efficiently compensated.

Other objects and further features of the present invention will be apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 shows a configuration example of a prior-art radio local are network (LAN) system using a macrodiversity;

FIG. 2 shows a block diagram of a first embodiment of a radio LAN system according to the present invention;

FIG. 3 shows illustrations for explaining an operation of a data-rate conversion part shown in FIG. 2. A signal A indicates an input signal, signals B indicate temporally divided signals, and signals C indicate output signals for respective radio base stations after rate conversion;

FIG. 4 shows an illustration for explaining a relationship between signal data for radio base stations 1 to 3 and signal data for a redundant radio base station n, the signal data for the radio base stations 1 to n being provided in the signals C shown in FIG. 3;

FIG. 5 shows a configuration example of the data-rate conversion part and the radio base stations shown in FIG. 2;

FIG. 6 shows a configuration example of a terminal station shown in FIG. 2;

FIG. 7 shows a block diagram of a second embodiment of the radio LAN system according to the present invention;

FIG. 8 shows a configuration example of a data-rate conversion part and radio base stations

shown in FIG. 7;

FIG. 9 shows a configuration example of a terminal station shown in FIG. 7;

FIG. 10 shows a block diagram of a third embodiment of the radio LAN system according to the present invention;

FIG. 11 shows a configuration example of a data-rate conversion part and radio base stations shown in FIG. 10;

FIG. 12 shows a block diagram of a fourth embodiment of the radio LAN system according to the present invention; and

FIG. 13 shows a configuration example of a data-rate conversion part and radio base stations shown in FIG. 12.

08/96/52 - 02059

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

First, a description will be given of a first embodiment of a radio LAN system according to the present invention, by referring to FIG. 2 to FIG. 6. FIG. 2 shows a block diagram of the first embodiment of the radio LAN system according to the present invention. FIG. 3 shows illustrations for explaining an operation of a data-rate conversion part shown in FIG. 2. A signal A indicates an input signal, signals B indicate temporally divided signals, and signals C indicate output signals for respective radio base stations after rate conversion.

FIG. 4 shows an illustration for explaining a relationship between signal data for radio base stations 1 to 3 and signal data for a redundant radio base station n, the signal data for the radio base stations 1 to n being provided in the signals C shown in FIG. 3. FIG. 5 shows a configuration example of the data-rate conversion part and the radio base stations shown in FIG. 2. FIG. 6 shows a configuration example of a terminal station shown in

FIG. 2.

In the radio LAN system according to the present invention shown in FIG. 2, inside an office, for a single terminal station 10 connected to at least one terminal unit, a plurality of radio base stations (in this case, a radio base station 1, a radio base station 2, a radio base station k (=3), and a radio base station n are provided.

In the first embodiment shown in FIG. 2, the radio base station n is used for the redundant radio base station (discussed in detail later). A signal transmitted from an external wiring LAN system is provided to a data-rate conversion part 20 through a HUB in an ATM. This input signal is represented by the signal A shown in FIG. 3. The input signal contains a signal for a terminal unit A, a signal for a terminal unit B, and a signal for a terminal unit C in addition to a discrimination signal.

Different case can exist in a connecting relation between the terminal station 10 and the terminal units A to C. For example, in one case, for each terminal station, the terminal unit is provided. In another case, a plurality of terminal units belong to a single terminal station. In either cases, by an address provided for each data, each data may be properly transmitted to an addressed terminal unit.

In the data-rate conversion part 20, as shown in the signals B in FIG. 3, the discrimination signal and the respective terminal-unit signals contained in the input signal A are time-divisionally divided into three signals for the radio base stations 1 to k (in the embodiment, k = 3) for each of the timeslots.

Further, as shown in the upper three signals of the signals C in FIG. 3, respective rates of the three divided signals are converted to three lower-rate signals. In this embodiment, the converted rate

0695952 0205952

is one-third of the input-signal data rate. Namely, in general, the input-signal data rate is converted to one divided by the number of radio base stations n-1 (in this case, k=n-1).

Also, as shown in the bottom signal of the signals C in FIG. 3, for the redundant radio base station n, specified data which has a given relationship with the data of the divided three signals is generated. For example, as shown in FIG. 4, the signal data for the redundant radio base station n may be set as a summation of the three signal data for the radio base stations 1 to k.

The above-discussed operation may be carried out by the configuration example of the data-rate conversion part 20 shown in FIG. 5. In a rate-conversion-and-distribution circuit 22 of the data-rate conversion part 20 shown in FIG. 5, the input signal shown in the signal A of FIG. 3 is converted to the upper three signal data of the signals C in FIG. 3. Subsequently, in a summation circuit 24, the three signal data for the radio base stations 1 to k are summed with each other to produce the signal data for the redundant radio base station n. In FIG. 5, for example, when a 156-Mbps transmission signal is provided from the wiring LAN system through the ATM-HUB, three 52-Mbps (= 156 Mbps / 3) transmission signals are transmitted to the radio base stations 1 to 3 and the redundant radio base station n.

Next, the four lower-rate-converted signals shown in the signals C of FIG. 3 are respectively transmitted to the terminal station 10. The terminal station 10 receives the above-discussed four signals through antennas and receivers corresponding to the four radio base stations.

As shown in FIG. 6, the terminal station 10 has a rate-conversion-and-multiplex circuit 11 which converts the transmission rate (in this case, 52 Mbps)

09/956,452 - 092501

of the three signals transmitted from the radio base stations 1 to 3 and multiplexes them to reproduce an original fast rate signal (shown in the signal A of FIG. 3, 156 Mbps). The reproduced 156-Mbps signal contains the signal for the terminal unit A, the signal for the terminal unit B, and the signal for the terminal unit C. If only the terminal unit A is connected to the terminal station 10, only the signal for the terminal unit A is provided to the terminal unit A from the reproduced 156-Mbps signal.

As discussed above, in the radio LAN system according to the present invention, the fast-rate transmission signal transmitted from the wiring LAN system is converted to the lower-rate transmission signal, and is transmitted from the plurality of radio base stations to the terminal station 10. Therefore, under the same transmit power, a ratio of the modulated signal to noise (C/N ratio) in the lower-rate transmission signal becomes large as compared to that in the fast-rate transmission signal. Namely, in order to obtain the desired C/N ratio, in a case of the lower-rate transmission signal, the transmit power of the radio base station may be reduced, and the antenna gains of the radio base stations and the terminal station may also be reduced. Therefore, power consumption of the radio LAN system may be reduced, and a relatively simplified antenna is usable for the radio LAN system.

Next, a description will be given of an operation of the radio LAN system according to the present invention when one of the three transmission paths between the radio base stations 1 to 3 and the terminal station 10 is interrupted. In the following, for example, as shown in FIG. 2, a case where the transmission path between the radio base station 3 and the terminal station 10 is interrupted will be shown.

In the terminal station 10 shown in FIG. 6,

the three signals transmitted from the radio base stations 1 to 3 are respectively monitored by interruption detection circuits 12-1, 12-2, 12-3, and which transmission path has been interrupted may be determined by an interruption detection control circuit 14. The interruption detection circuits 12-1, 12-2, 12-3 may be easily constructed with, for example, an RF level detector, etc.

Further, in FIG. 6, in the same way as the summation circuit 24 in the data-rate conversion part 20 shown in FIG. 5, the three signals from the radio base stations 1 to 3 are summed for each given timeslot in a summation circuit 13. In this case, when signal data transmitted from the interrupted transmission path is substantially random data due to noise, the interruption detection control circuit 14 controls the signal data transmitted from the interrupted transmission path not to be added to the summation or to be all zero.

Therefore, in a subtraction circuit 15, when summed data from the summation circuit 13 is subtracted from the signal data transmitted from the redundant radio base station n, the subtraction circuit 15 may produce correct original signal data on the interrupted transmission path. Further, the interruption detection control circuit 14 controls a switching circuit 16 to insert the correct original signal data from the subtraction circuit 15 into the interrupted transmission path.

The above-discussed operation may be commonly represented by the following equation.

$$\text{data } k = \text{data } n - \{\text{data } 1 + \ldots \text{ data } (k-1) + \text{data } (k+1) + \ldots \text{ data } (n-1)\},$$

where data i indicates data transmitted from a radio base station i to the terminal station 10.

0 6 3 5 2 0 5 0 2 0 5 3 0 4

By the above-discussed operation, the signal data lost due to interruption of the transmission path may be compensated. In the prior-art radio LAN system using macrodiversity, fast-rate data is transmitted to the terminal station through a plurality of radio transmission paths, the signal data lost due to interruption of the transmission path is intended to be compensated by signal data transmitted through another transmission path.

On the contrary, in the radio LAN system according to the present invention, in order to carry out a data communication at the same fast-rate transmission, the lower-rate data is transmitted to the terminal station through a plurality of transmission paths, and also, an additional redundant transmission path is provided. As a result, the lost data in the interrupted transmission path may be positively compensated.

Therefore, as discussed previously, the transmit power and the antenna gain may be reduced, and data compensation function in the interrupted transmission path may be positively obtained. As a result, the radio LAN system with higher-rate (broad band) data transmission may be realized.

In the above-discussed radio LAN system according to the present invention, the given relationship described in the data-rate conversion part 20 shown in FIG. 2 is not limited to a summation operation. Namely, when the transmission path is interrupted, lost data in the interrupted transmission path may be determined from the other signal data by any operation, the operation is applicable for the data-rate conversion part 20.

Next, a description will be given of a second embodiment of the radio LAN system according to the present invention, by referring to FIG. 7 to FIG. 9. FIG. 7 shows a block diagram of the second

0950952 0950952

embodiment of the radio LAN system according to the present invention. FIG. 8 shows a configuration example of a data-rate conversion part and radio base stations shown in FIG. 7. FIG. 9 shows a configuration example of a terminal station shown in FIG. 7.

The second embodiment of the radio LAN system shown in FIG. 7 has substantially the same operation as that of the first embodiment of the radio LAN system shown in FIG. 2. In the radio LAN system shown in FIG. 7, in addition to a plurality of conventional radio base stations 1 to n-1 (in an example of FIG. 7, to simplify the description, only the radio base stations 1, 2 are shown), a plurality of redundant radio base stations (radio base stations n, n+1, in FIG. 7) are provided.

Namely, in the second embodiment shown in FIG. 7, in the same way as the data-rate conversion part 20 shown in FIG. 2, in a data-rate conversion part 40, the signal (for example, 156 Mbps) transmitted from the wiring LAN system through the ATM-HUB is distributed into (n-1) signals corresponding to the radio base stations 1 to n-1. Further, the distributed signals are converted to lower-rate signals (for example, 156/(n-1) Mbps). The above-discussed operation is carried out in a rate-conversion-and-distribution circuit 42 shown in FIG. 8.

Further, in the data-rate conversion part 40 shown in FIG. 8, the signals for the (n-1) conventional radio base stations are distributed into two groups of signals (for example, odd-number radio base stations and even-number radio base stations). In summation circuits 44-1, 44-2, the two groups of signals are respectively summed for each given timeslot to generate two signals for the redundant radio base station n and the redundant radio base

station n+1.

The rate-converted signals produced from the data-rate conversion part 40 are respectively transmitted to the terminal station 30 on the lower frequency band through the radio base stations 1 to n+1.

In the terminal station 30 shown in FIG. 9, signals received from the radio base stations 1 to n-1 are provided to a rate-conversion-and-multiplex circuit 31. The rate-conversion-and-multiplex circuit 31 converts the received signals into original-fast-rate (156Mbps) signals, and multiplexes the received signals to reproduce an original signal transmitted from the wiring LAN system.

In the same way as the terminal station 10 shown in FIG. 6, the terminal station 30 has interruption detection circuits 32-1 to 32-(n-1) on transmission paths for the radio base stations 1 to n-1 and an interruption detection control circuit 34 connected to the interruption detection circuits 32-1 to 32-(n-1). The interruption detection control circuit 34 may detect which transmission path has been interrupted.

Further, in FIG. 9, in the same way as the data-rate conversion part 40, signals transmitted from the radio base stations 1 to n-1 are distributed into two groups of signals (in this case, signals from the odd-number radio base stations, and signals from the even-number radio base stations). In summation circuits 33-1, 33-2, the two groups of signals are respectively summed for each given timeslot.

At this time, when a certain transmission path is interrupted, since the signal data transmitted from the interrupted transmission path is substantially random data due to noise, the interruption detection control circuit 34 controls the signal data transmitted from the interrupted

transmission path not to be added to the summation or to be all zero.

Further, in subtraction circuits 35-1, 35-2, when summed data from the summation circuits 33-1, 33-2 is respectively subtracted from the signal data transmitted from the redundant radio base stations n and n+1, one of the subtraction circuits 35-1, 35-2 may produce correct original signal data of the interrupted transmission path. Further, the interruption detection control circuit 34 controls a switching circuit 34 to insert the correct original signal data from one of the subtraction circuits 35-1, 35-2 into the interrupted transmission path.

Namely when the transmission path for the odd-number radio base station is interrupted, the correct signal data is inserted by the subtraction circuit 35-1, and when the transmission path for the even-number radio base station is interrupted, the correct signal data is inserted by the subtraction circuit 35-2.

According to the above-discussed radio LAN system, in the same way as the radio LAN system shown in FIG. 2, an advantage by the lower-rate radio transmission is provided. Further, even when two transmission paths (in the different groups) are simultaneously interrupted, the signal data of the interrupted transmission paths may be positively compensated.

In the radio LAN system shown in FIG. 7, the transmission paths between the radio base stations and the terminal station 30 are distributed into the two groups of signals, and the two redundant radio base stations are provided. However, by providing an additional number of groups of transmission paths and an additional number of redundant radio base stations, compensating performance for the interrupted data may be improved.

0960252-000694

Next, a description will be given of a third embodiment of the radio LAN system according to the present invention, by referring to FIG. 10 and FIG. 11. FIG. 10 shows a block diagram of the third embodiment of the radio LAN system according to the present invention. FIG. 11 shows a configuration example of a data-rate conversion part and radio base stations shown in FIG. 10. A terminal station 50 shown in FIG. 10 has substantially the same configuration as that of the data-rate conversion part and the radio base stations shown in FIG. 11.

In the radio LAN system according to the present invention shown in FIG. 10, inside the office, for the single terminal station 50 connected to at least one terminal unit, a plurality of radio base stations (in this case, radio base stations 1 to n) are provided. In the third embodiment shown in FIG. 10, the radio base station n is used for the redundant radio base station. Further, between the respective radio base stations and the terminal station 50, two-way communications are established. Therefore, as shown in FIG. 11, in each radio base station (including a data-rate conversion part 60) and the terminal station 50, a transmitter, the rate-conversion-and-distribution circuit, and the rate-conversion-and-multiplex circuit are respectively provided.

Further, because of the two-way communication, by monitoring an up-link transmission path from the terminal station 50 to the radio base station, the radio base station also may monitor whether the transmission path is interrupted (referred to as an interruption state). Therefore, as shown in FIG. 10 and FIG. 11, in the data-rate conversion part 60, an up-link monitoring mechanism comprising interruption detection circuits 66-1 to 66-(n-1) and an interruption detection control circuit 67 is

provided.

In the following, a description will be given of an operation of the radio LAN system shown in FIG. 10.

The signal transmitted from the external wiring LAN system is provided to the data-rate conversion part 60 through the ATM-HUB. In the same way as the first embodiment of the radio LAN system shown in FIG. 2, the input signal is distributed into a plurality of signals, each having a 1/(n-1) of the input-signal's transmission rate. Distributed signals are transmitted of the terminal station 50 through the radio base stations 1 to n-1.

In this case, to the signal for the redundant radio base station n, one of the signals for the radio base stations 1 to n-1 may be allocated by a switching circuit 64.

In the terminal station 50, in the same operation as that of the radio LAN system shown in FIG. 2, received signals from the radio base stations 1 to n-1 are provided to a rate-conversion-and-multiplex circuit 61 to be converted and multiplexed into an original fast-rate (156 Mbps) signal. As a result, an original signal which has been transmitted from the wiring LAN system is reproduced.

In the same way, because of the two-way communication, the lower-rate signals which are converted and distributed in the terminal station 50 are transmitted to the respective radio base stations 1 to n-1, and are converted and multiplexed to the original fast-rate signal in the rate-conversion-and-multiplex circuit 61 of the data-rate conversion part 60 to reproduce the signal to be transmitted to the wiring LAN system.

As shown in FIG. 10, when the transmission paths between the radio base station k and the terminal station 50 is interrupted, the interrupted

transmission path is detected by the up-link monitoring mechanism in the data-rate conversion part 60. Subsequently, by the switching circuit 64, the signal data in the interrupted transmission path (data from the radio base station k) is transmitted to the redundant radio base station n, and is transmitted to the terminal station 50.

In the terminal station 50, a down-link monitoring mechanism having the same configuration as that of the up-link monitoring mechanism is provided. Therefore, the terminal station 50 also detects the interrupted transmission path. Accordingly, by a switching circuit (corresponding to the switching circuit 63 in the data-rate conversion part 60), the data transmitted from the radio base station n is used instead of the data from the radio base station k.

In the above-discussed operation, by using the down-link monitoring mechanism in the terminal station 50, the terminal station 50 may detect the interrupted transmission path. However, also by providing information of an output result (the interrupted transmission path) of the up-link monitoring mechanism into the data transmitted from the radio base station n to the terminal station 50, the terminal station 50 may detect the interrupted transmission path from that information in order to control the switching circuit.

Next, a description will be given of a fourth embodiment of the radio LAN system according to the present invention, by referring to FIG. 12 and FIG. 13. FIG. 12 shows a block diagram of the fourth embodiment of the radio LAN system according to the present invention. FIG. 13 shows a configuration example of a data-rate conversion part and radio base stations shown in FIG. 12. A terminal station 70 shown in FIG. 12 has substantially the same configuration as that of the data-rate conversion part

and the radio base stations shown in FIG. 13.

The fourth embodiment of the radio LAN system shown in FIG. 12 has substantially the same operation as that of the third embodiment of the radio LAN system shown in FIG. 10. In the radio LAN system shown in FIG. 12, in addition to a plurality of conventional radio base stations 1 to n-1 (in an example of FIG. 12, to simplify the description, only the radio base stations 1, 2 are shown), a plurality of redundant radio base stations (radio base stations n, n+1) are provided.

In the fourth embodiment shown in FIG. 12, the operations, in which the signal transmitted from the wiring LAN system through the ATM-HUB is transmitted to a terminal station 70 through a data-rate conversion part 80 and the radio base stations 1 to n-1, and an operation that the signal produced from the terminal station 70 is transmitted to the wiring LAN system through the radio base stations 1 to n-1 and the data-rate conversion part 80, are substantially the same as the operations of the third embodiment of the radio LAN system shown in FIG. 10. Therefore, also in the fourth embodiment of the radio LAN system, between the radio base stations 1 to n-1 and the terminal station 70, the signals may be transmitted at the lower transmission rate.

Further, in the fourth embodiment shown in FIG. 12, different from the third embodiment shown in FIG. 10, the redundant radio base station n+1 is additionally provided. As shown in FIG. 13, the redundant radio base station n+1 with the redundant radio base station n is connected to a switching circuit 84. In the switching circuit 84, by an up-link monitoring mechanism constructed with interruption detection circuits 86-1 to 86-(n-1) and an interruption detection control circuit 87, data to be transmitted to the radio base station on an

interrupted transmission path is controlled to be transmitted to the redundant radio base station n or the redundant radio base station n+1.

In the same way as a down-link transmission path, the redundant radio base station n+1 with the redundant radio base station n is connected to a switching circuit 83. In the switching circuit 83, by the down-link monitoring mechanism, instead of data transmitted from the radio base station through the interrupted transmission path, data transmitted from the redundant radio base station n or the redundant radio base station n+1 is selected and is provided to a rate-conversion-and-multiplex circuit 81.

In the above-discussed operation, when one of the transmission paths between the radio base stations 1 to n-1 and the terminal station 70 is interrupted, the redundant radio base station n is used. Further, when two of the transmission paths are simultaneously interrupted, the redundant radio base station n and the redundant radio base station n+1 are used.

As discussed above, in the fourth embodiment of the radio LAN system, in the same way as the radio LAN system shown in FIG. 10, advantages based on the lower-rate radio transmission may be obtained. Further, even when a plurality of transmission paths are simultaneously interrupted, the signal data of the interrupted transmission paths may be positively compensated.

In the fourth embodiment of the radio LAN system shown in FIG. 12, the two redundant radio base stations are provided. However, by providing an additional number of redundant radio base stations, data of an additional number of interrupted transmission paths may be compensated while obtaining the advantages based on the lower-rate radio transmission.

Further, the present invention is not limited to these embodiments, but other variations and modifications may be made without departing from the scope of the present invention.

0950452-020504

WHAT IS CLAIMED IS:

1. A communication method for a radio LAN system providing communication at a first transmission rate, said method comprising the steps of:

(a) time-divisionally distributing a first signal of said first transmission rate into n-1 second signals (n = 3, 4, ...);

(b) respectively converting said n-1 second signals into n-1 third signals of a second transmission rate less than said first transmission rate; and

(c) transmitting said n-1 third signals of said second transmission rate through radio transmission paths between n-1 radio base stations and a terminal station connected to at least one terminal unit.

2. The method as claimed in claim 1, wherein said second transmission rate is 1/(n-1) of said first transmission rate.

3. The method as claimed in claim 1, wherein:

said radio LAN system further comprises at least one redundant radio base station n; and

said method further comprises the steps of:

(d) transmitting a fourth signal through a

radio transmission path between said terminal station and said at least one redundant radio base station n, data of said fourth signal having a given relationship with data in signals transmitted between at least k ($k \leq (n-1)$) radio base stations of said n-1 radio base stations and said terminal station; and

(e) compensating, when at least one transmission path between said at least k radio base stations and said terminal station is interrupted, data of the signal to be transmitted through an interrupted transmission path based on said data of said fourth signal transmitted between said at least one redundant radio base station n and said terminal station.

4. The method as claimed in claim 3, wherein said given relationship in said step (d) is that said data of said fourth signal transmitted between said at least one redundant radio base station n and said terminal station is a summation of data of the signals transmitted between said at least k radio base stations and said terminal station for each given time slot.

5. The method as claimed in claim 1, wherein:

said radio LAN system further comprises at least one redundant radio base station n; and

said method further comprises the steps of:

(f) monitoring interruption of transmission paths between said n-1 radio base stations and said

terminal station; and

(g) compensating, when one of said transmission paths is interrupted, data of an interrupted transmission path by transmitting said data of the interrupted transmission path between said at least one redundant radio base station n and said terminal station.

6. A communication apparatus for a radio LAN system providing communication at a first transmission rate, said apparatus comprising:

rate-conversion-and-distribution means for time-divisionally distributing a first signal of said first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting said n-1 second signals into n-1 third signals of a second transmission rate less than said first transmission rate; and

n-1 radio base stations transmitting said n-1 third signals of said second transmission rate to a terminal station connected to at least one terminal unit through radio transmission paths.

7. The apparatus as claimed in claim 6, wherein said second transmission rate is 1/(n-1) of said first transmission rate.

8. The apparatus as claimed in claim 6,

further comprising:

at least one summation means for generating a fourth signal by summing data of at least k ($k \leq (n-1)$) signals of said n-1 third signals of said second transmission rate every timeslots; and

at least one redundant radio base station n transmitting said fourth signal generated in said at least one summation means to said terminal station.

9. The apparatus as claimed in claim 6, further comprising:

at least one redundant radio base station n transmitting a signal to said terminal station;

line monitoring means for monitoring interruption of transmission paths between said n-1 radio base stations and said terminal station; and

switching means, when at least one of said transmission paths is interrupted, for forwarding a signal to be transmitted through an interrupted transmission path to said at least one redundant radio base station n.

10. A terminal station used in a radio LAN system having rate-conversion-and-distribution means for time-divisionally distributing a first signal of a first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting said n-1 second signals into n-1 third signals of a second transmission rate less than said first transmission rate, and n-1 radio base stations transmitting said n-1 third signals of said second transmission rate to

said terminal station connected to at least one terminal unit through radio transmission paths, said terminal station comprising:

a receiver receiving said third signals of said second transmission rate transmitted from said n-1 radio base stations; and

rate-conversion-and-multiplex means for converting and multiplexing received third signals of said second transmission rate into signals of said first transmission rate.

11. A terminal station used in a radio LAN system having rate-conversion-and-distribution means for time-divisionally distributing a first signal of a first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting said n-1 second signals into n-1 third signals of a second transmission rate less than said first transmission rate, n-1 radio base stations transmitting said n-1 third signals of said second transmission rate to said terminal station connected to at least one terminal unit through radio transmission paths, at least one first summation means for generating a fourth signal by summing data of at least k ($k \leq (n-1)$) signals of said n-1 third signals of said second transmission rate for every timeslot, and at least one redundant radio base station n transmitting said fourth signal generated in said at least one first summation means to said terminal station, said terminal station comprising:

a receiver receiving said third signals of said second transmission rate transmitted from said n-1 radio base stations;

rate-conversion-and-multiplex means for

converting and multiplexing received third signals of said second transmission rate into signals of said first transmission rate;

line monitoring means for monitoring interruption of transmission paths between said n-1 radio base stations and said terminal station;

at least one second summation means, when at least one of said transmission paths is interrupted, for generating a fifth signal by summing data of every timeslots of at least k signals of signals transmitted from said n-1 radio base stations except for a signal to be transmitted through an interrupted transmission path;

at least one subtraction means for generating subtraction data between data of the signal transmitted from said redundant radio base station n and data of said fifth signal generated in said second summation means; and

switching means for providing said subtraction data generated in said subtraction means to said rate-conversion-and-multiplex means instead of providing data of an interrupted signal detected in said monitoring means;

wherein even when at least one of signals transmitted from said n-1 radio base stations is interrupted, data of the interrupted signal is compensated.

12. A terminal station used in a radio LAN system having rate-conversion-and-distribution means for time-divisionally distributing a first signal of a first transmission rate into n-1 second signals (n = 3, 4, ...) and respectively converting said n-1 second signals into n-1 third signals of a second

transmission rate less than said first transmission rate, n-1 radio base stations transmitting said n-1 third signals of the second transmission rate to said terminal station connected to at least one terminal unit through radio transmission paths, at least one redundant radio base station n transmitting a signal to said terminal station, first line monitoring means for monitoring interruption of transmission paths between said n-1 radio base stations and said terminal station, and first switching means, when at least one of said transmission paths is interrupted, for forwarding a signal to be transmitted through an interrupted transmission path to said at least one redundant radio base station n; said terminal station comprising:

a receiver receiving said third signals of the second transmission rate transmitted from said n-1 radio base stations;

rate-conversion-and-multiplex means for converting and multiplexing received third signals of the second transmission rate into signals of said first transmission rate;

second line monitoring means for monitoring interruption of transmission paths between said n-1 radio base stations and said terminal station; and

second switching means, when at least one of said transmission paths is interrupted, for providing the signal transmitted form said redundant radio base station to said rate-conversion-and-multiplex means instead of providing a signal to be transmitted through an interrupted transmission path;

wherein even when at least one of signals transmitted from said n-1 radio base stations is interrupted, data of the interrupted signal is compensated.

ABSTRACT OF THE DISCLOSURE

A communication method for a radio LAN system provides communication at a first transmission rate. In the method, a first signal of the first transmission rate it time-divisionally distributed into n-1 second signals (n = 3, 4, ...). The n-1 second signals are respectively converted into n-1 third signals of a second transmission rate less than the first transmission rate. And, the n-1 third signals of the second transmission rate are transmitted through radio transmission paths between n-1 radio base stations and a terminal station connected to at least one terminal unit.

0954552-050699

FIG. 1 PRIOR ART

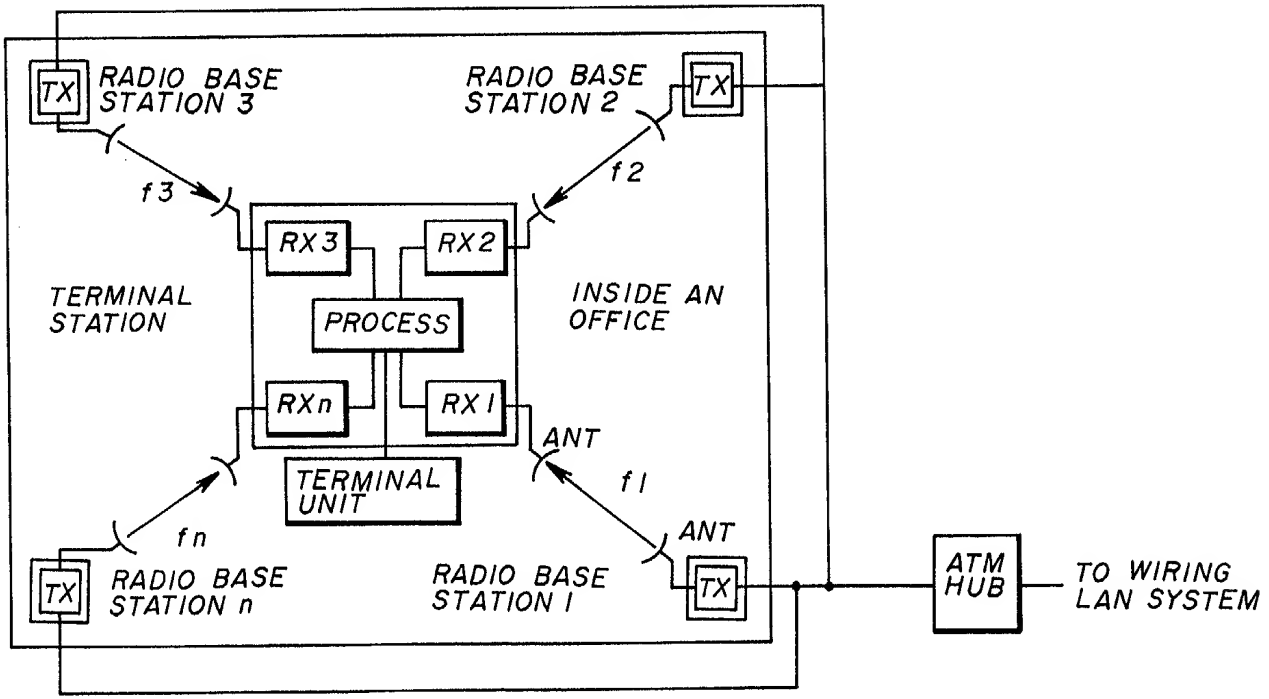

FIG.2

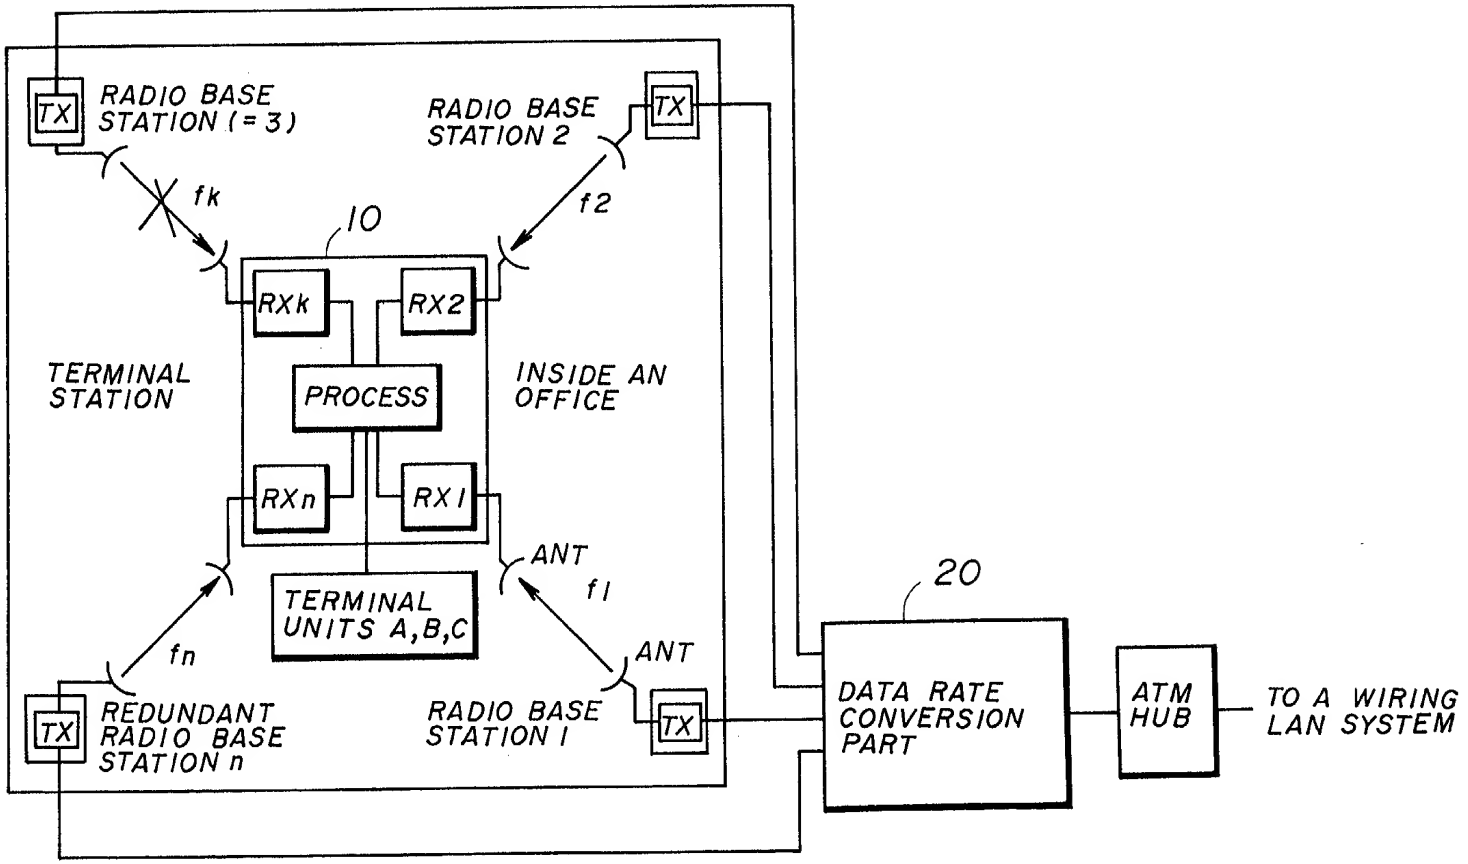
RADIO BASE STATION (=3)
RADIO BASE STATION 2
TX
fk
f2
10
RXk
RX2
TERMINAL STATION
PROCESS
INSIDE AN OFFICE
RXn
RX1
ANT
f1
TERMINAL UNITS A,B,C
20
fn
ANT
REDUNDANT RADIO BASE STATION n
RADIO BASE STATION 1
DATA RATE CONVERSION PART
ATM HUB
TO A WIRING LAN SYSTEM

FIG.3

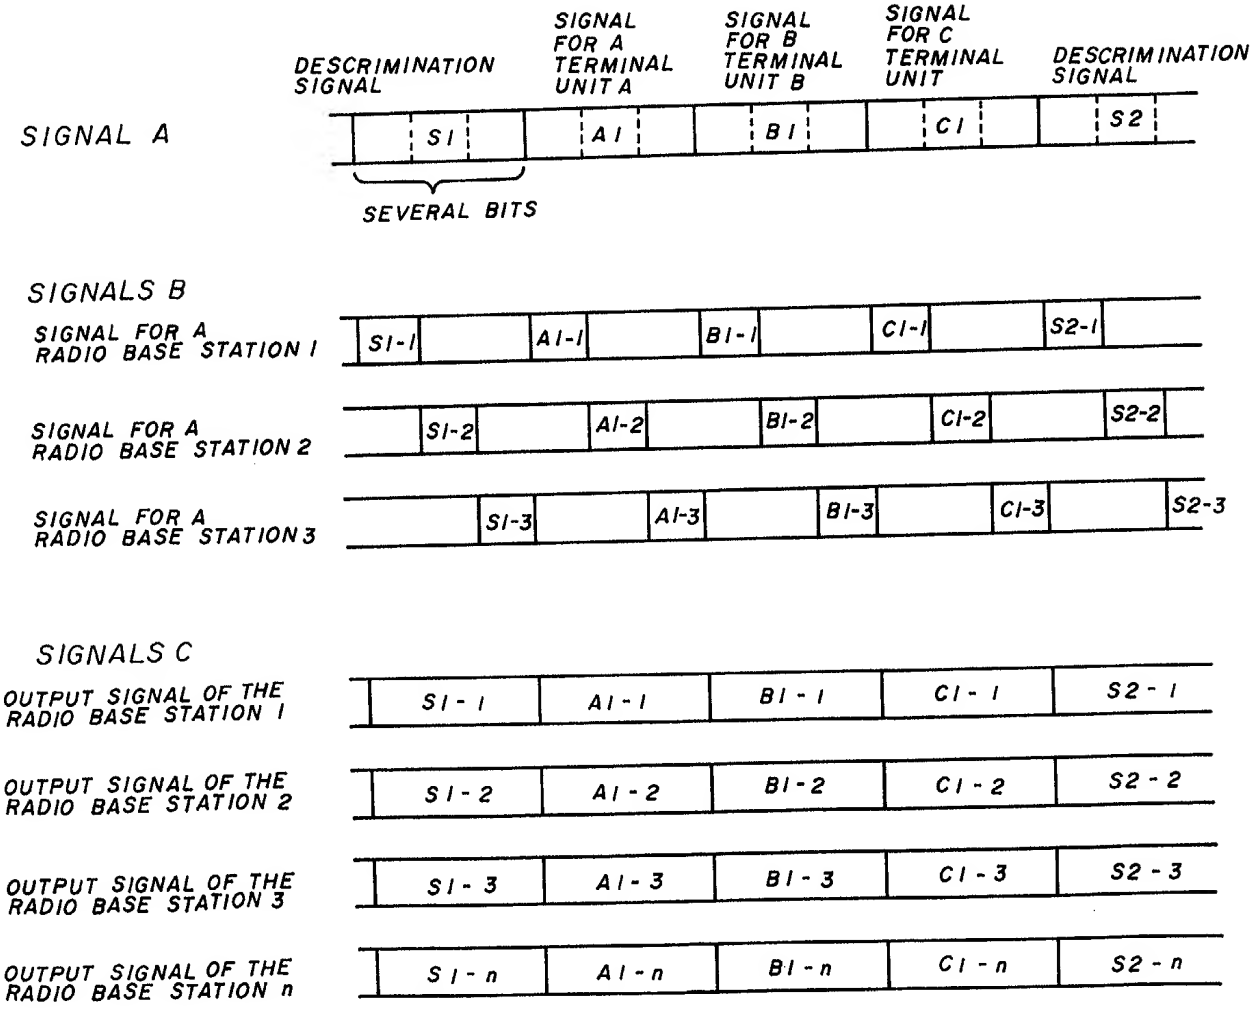
DESCRIMINATION SIGNAL
SIGNAL FOR A TERMINAL UNIT A
SIGNAL FOR B TERMINAL UNIT B
SIGNAL FOR C TERMINAL UNIT
DESCRIMINATION SIGNAL
SIGNAL A
S1
A1
B1
C1
S2
SEVERAL BITS
SIGNALS B
SIGNAL FOR A RADIO BASE STATION 1
S1-1
A1-1
B1-1
C1-1
S2-1
SIGNAL FOR A RADIO BASE STATION 2
S1-2
A1-2
B1-2
C1-2
S2-2
SIGNAL FOR A RADIO BASE STATION 3
S1-3
A1-3
B1-3
C1-3
S2-3
SIGNALS C
OUTPUT SIGNAL OF THE RADIO BASE STATION 1
S1-1
A1-1
B1-1
C1-1
S2-1
OUTPUT SIGNAL OF THE RADIO BASE STATION 2
S1-2
A1-2
B1-2
C1-2
S2-2
OUTPUT SIGNAL OF THE RADIO BASE STATION 3
S1-3
A1-3
B1-3
C1-3
S2-3
OUTPUT SIGNAL OF THE RADIO BASE STATION n
S1-n
A1-n
B1-n
C1-n
S2-n

FIG.4

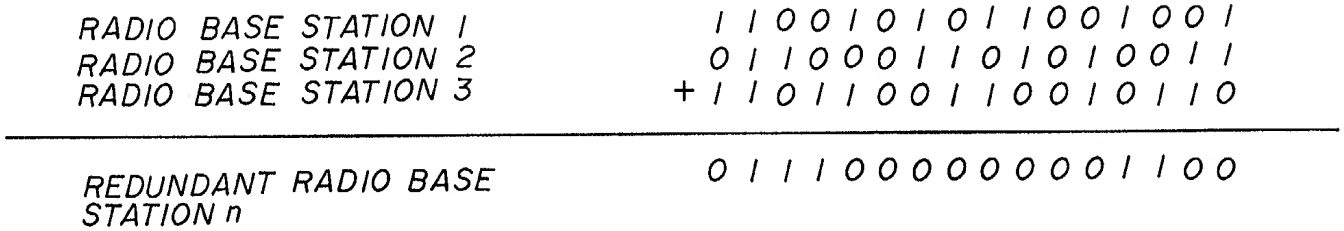
RADIO BASE STATION 1
RADIO BASE STATION 2
RADIO BASE STATION 3
1 1 0 0 1 0 1 0 1 1 0 0 1 0 0 1
0 1 1 0 0 0 1 1 0 1 0 1 0 0 1 1
+ 1 1 0 1 1 0 0 1 1 0 0 1 0 1 1 0
REDUNDANT RADIO BASE STATION n
0 1 1 1 0 0 0 0 0 0 0 0 1 1 0 0

FIG. 5

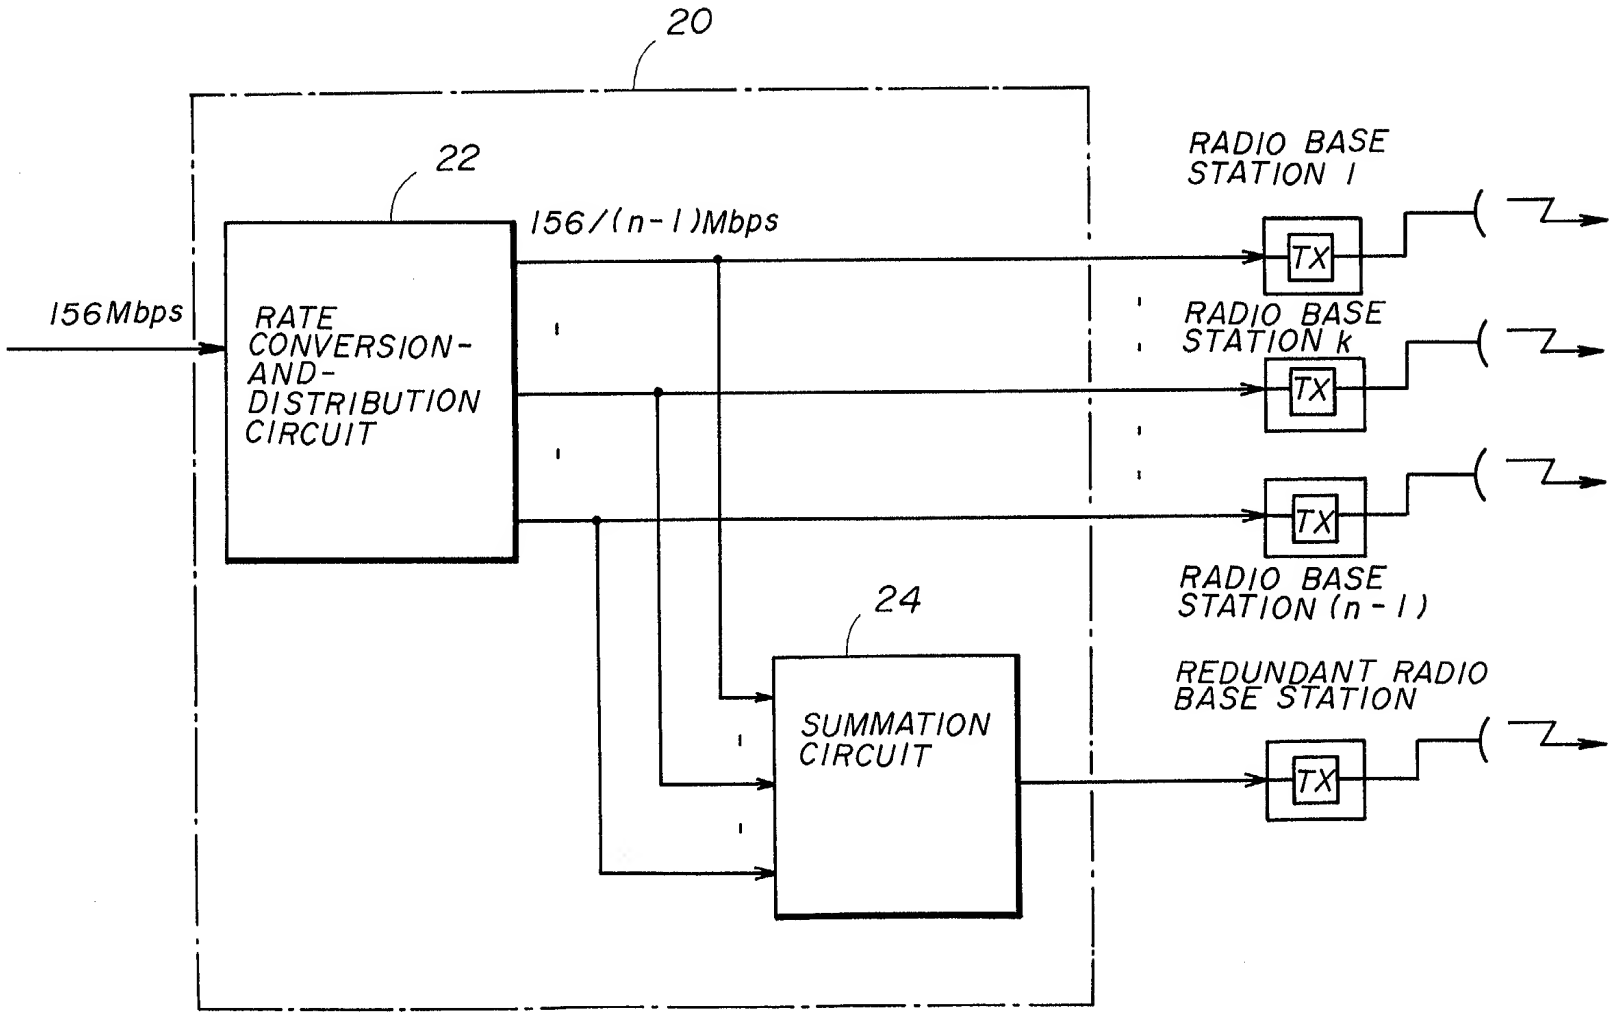
20
22
156Mbps
RATE CONVERSION-AND-DISTRIBUTION CIRCUIT
156/(n-1)Mbps
24
SUMMATION CIRCUIT
TX
TX
TX
TX
RADIO BASE STATION 1
RADIO BASE STATION k
RADIO BASE STATION (n-1)
REDUNDANT RADIO BASE STATION

0879697SE .02069Z

FIG. 6

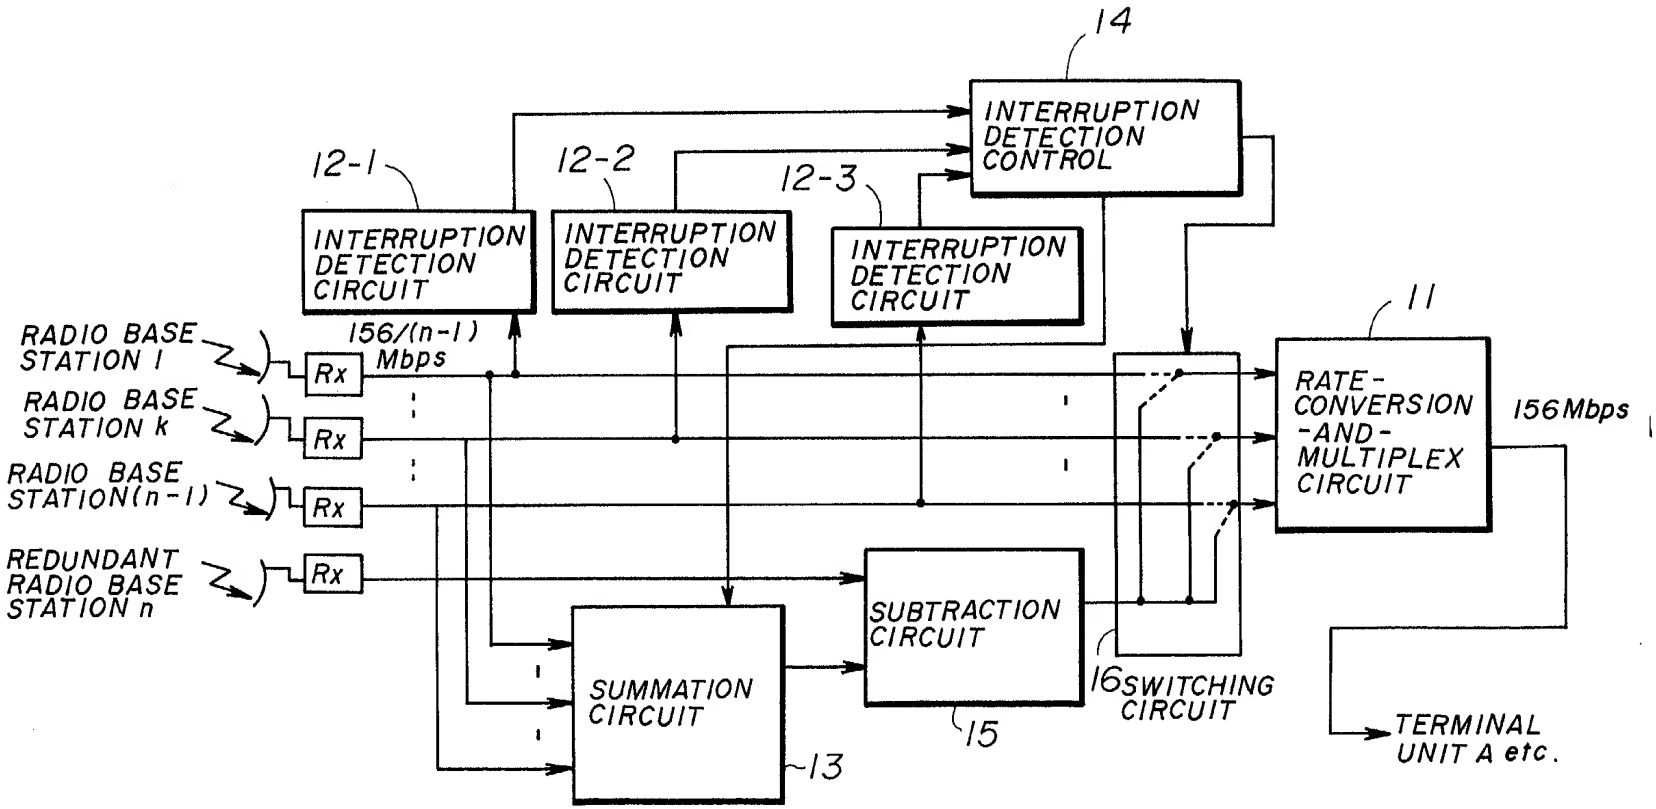

FIG. 7

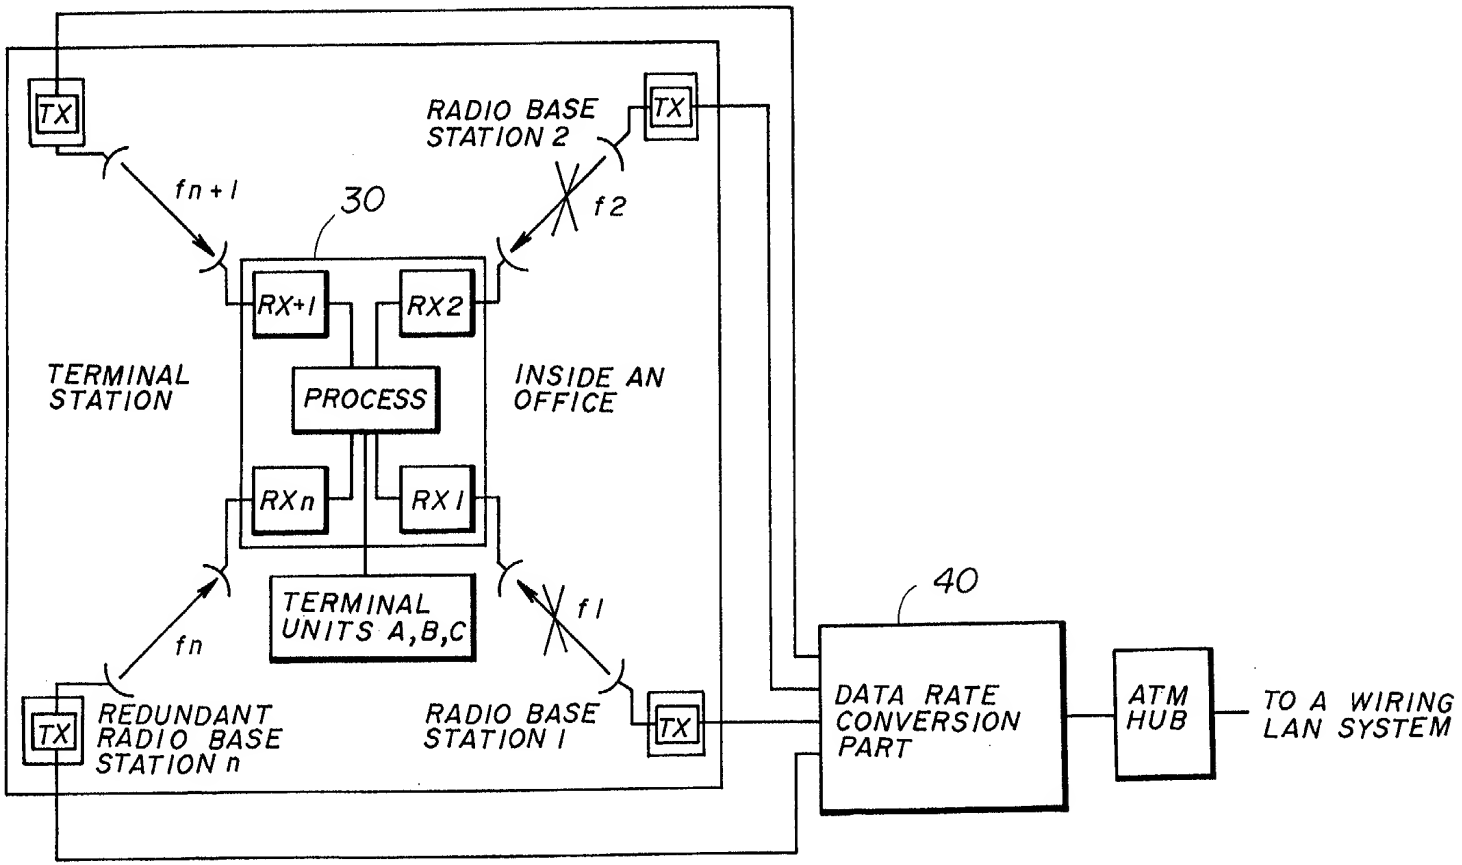
TX
RADIO BASE STATION 2
TX
fn+1
30
f2
RX+1
RX2
TERMINAL STATION
PROCESS
INSIDE AN OFFICE
RXn
RX1
TERMINAL UNITS A,B,C
40
f1
fn
TX
REDUNDANT RADIO BASE STATION n
RADIO BASE STATION 1
TX
DATA RATE CONVERSION PART
ATM HUB
TO A WIRING LAN SYSTEM

08796752 "02069

FIG. 8

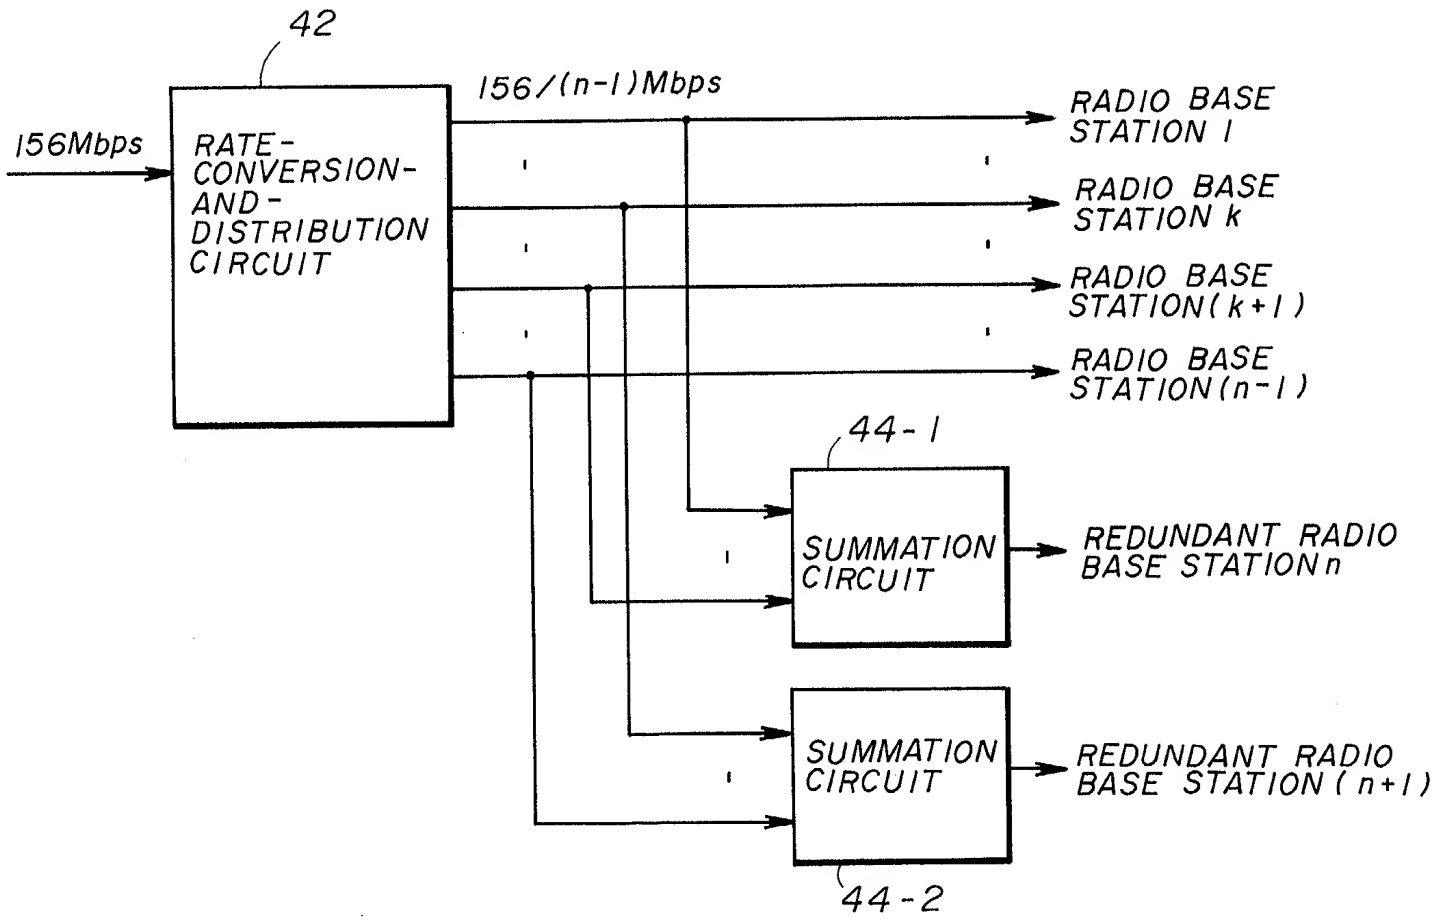

FIG. 9

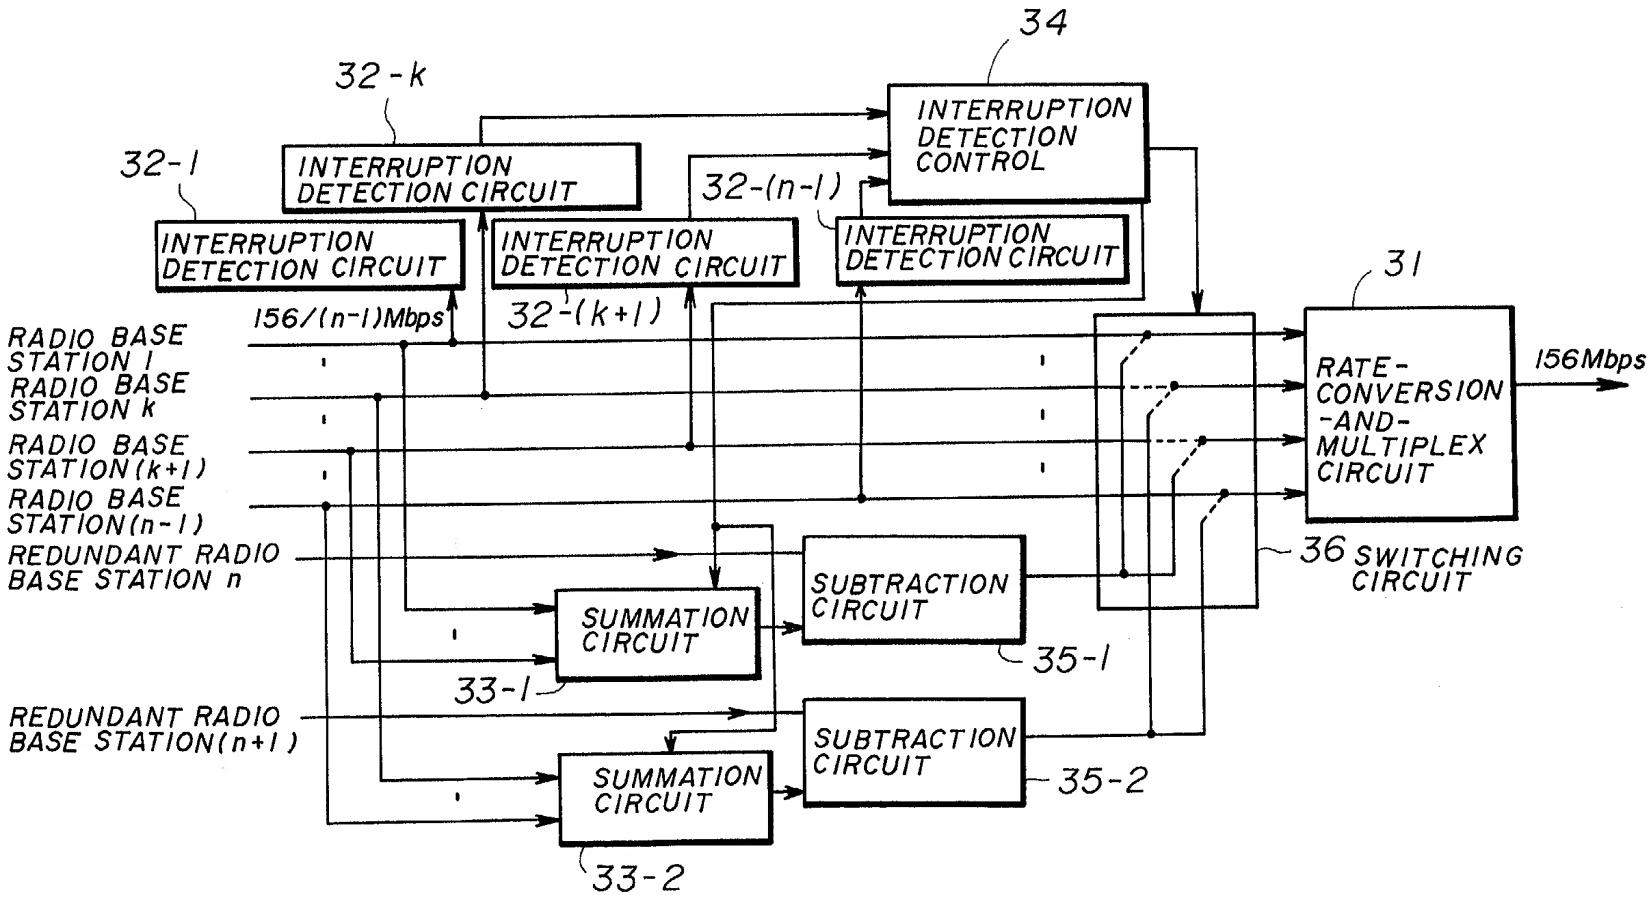
34
32-k
INTERRUPTION DETECTION CONTROL
32-1
INTERRUPTION DETECTION CIRCUIT
32-(n-1)
INTERRUPTION DETECTION CIRCUIT
INTERRUPTION DETECTION CIRCUIT
INTERRUPTION DETECTION CIRCUIT
31
156/(n-1)Mbps
32-(k+1)
RADIO BASE STATION 1
RADIO BASE STATION k
RADIO BASE STATION(k+1)
RADIO BASE STATION(n-1)
REDUNDANT RADIO BASE STATION n
RATE-CONVERSION-AND-MULTIPLEX CIRCUIT
156Mbps
36 SWITCHING CIRCUIT
SUMMATION CIRCUIT
SUBTRACTION CIRCUIT
33-1
35-1
REDUNDANT RADIO BASE STATION(n+1)
SUMMATION CIRCUIT
SUBTRACTION CIRCUIT
35-2
33-2

FIG. 10

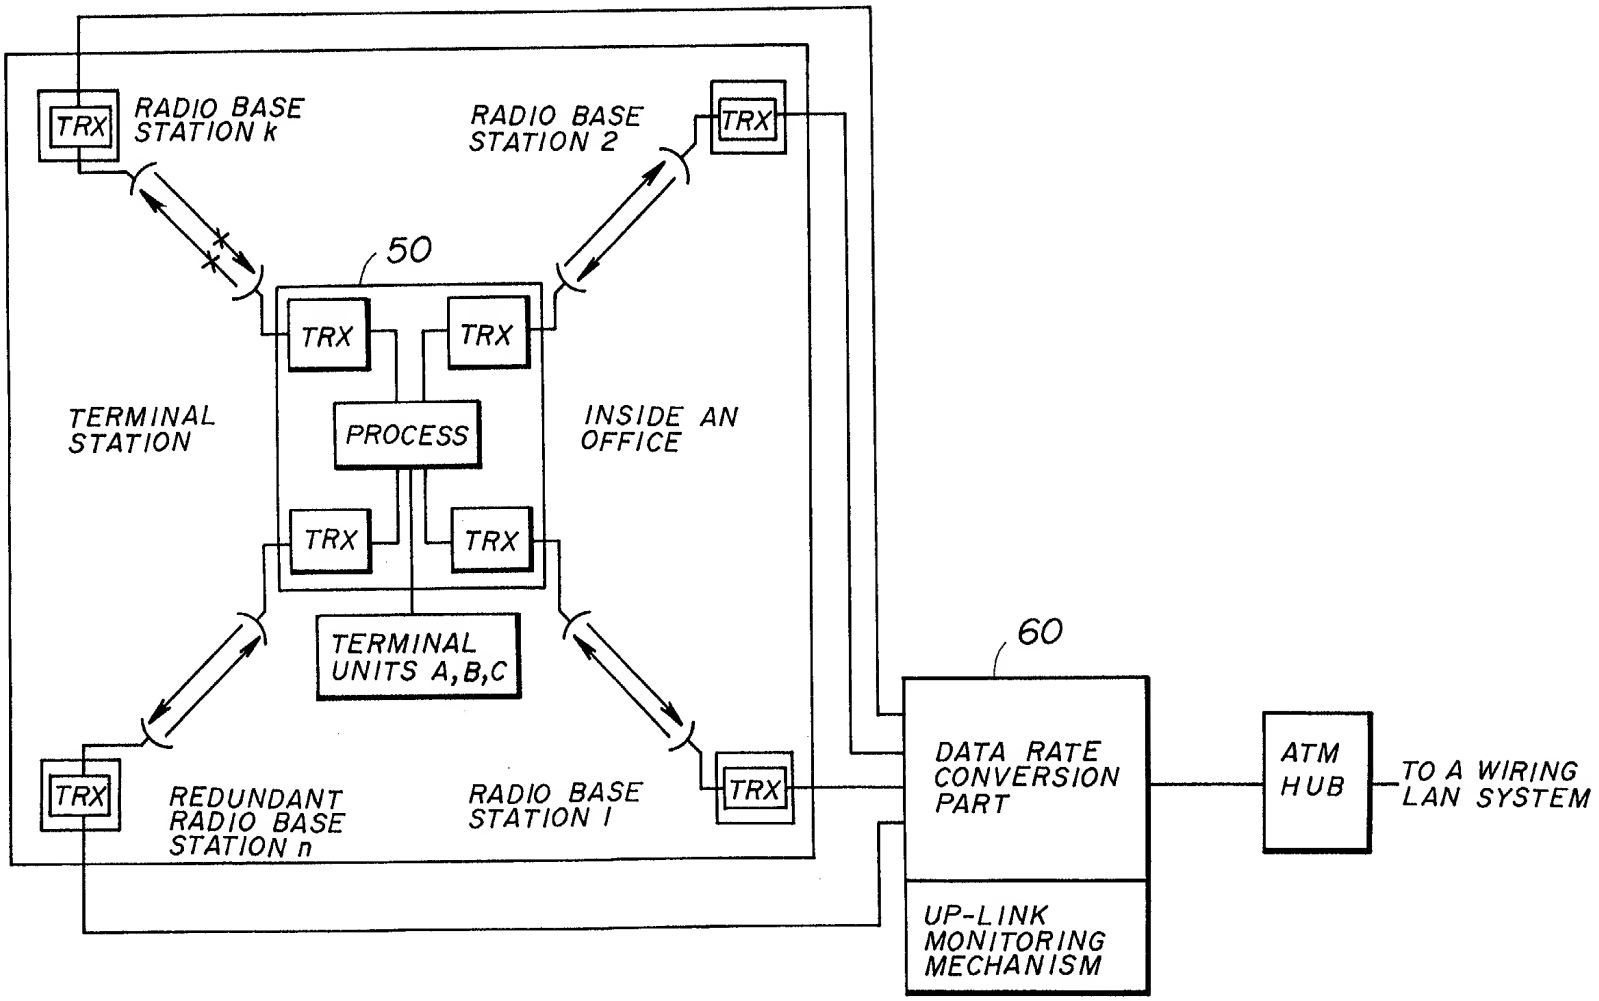
TRX
RADIO BASE STATION k
RADIO BASE STATION 2
TRX
50
TRX
TRX
TERMINAL STATION
PROCESS
INSIDE AN OFFICE
TRX
TRX
TERMINAL UNITS A,B,C
60
TRX
REDUNDANT RADIO BASE STATION n
RADIO BASE STATION 1
TRX
DATA RATE CONVERSION PART
ATM HUB
TO A WIRING LAN SYSTEM
UP-LINK MONITORING MECHANISM

FIG. 11

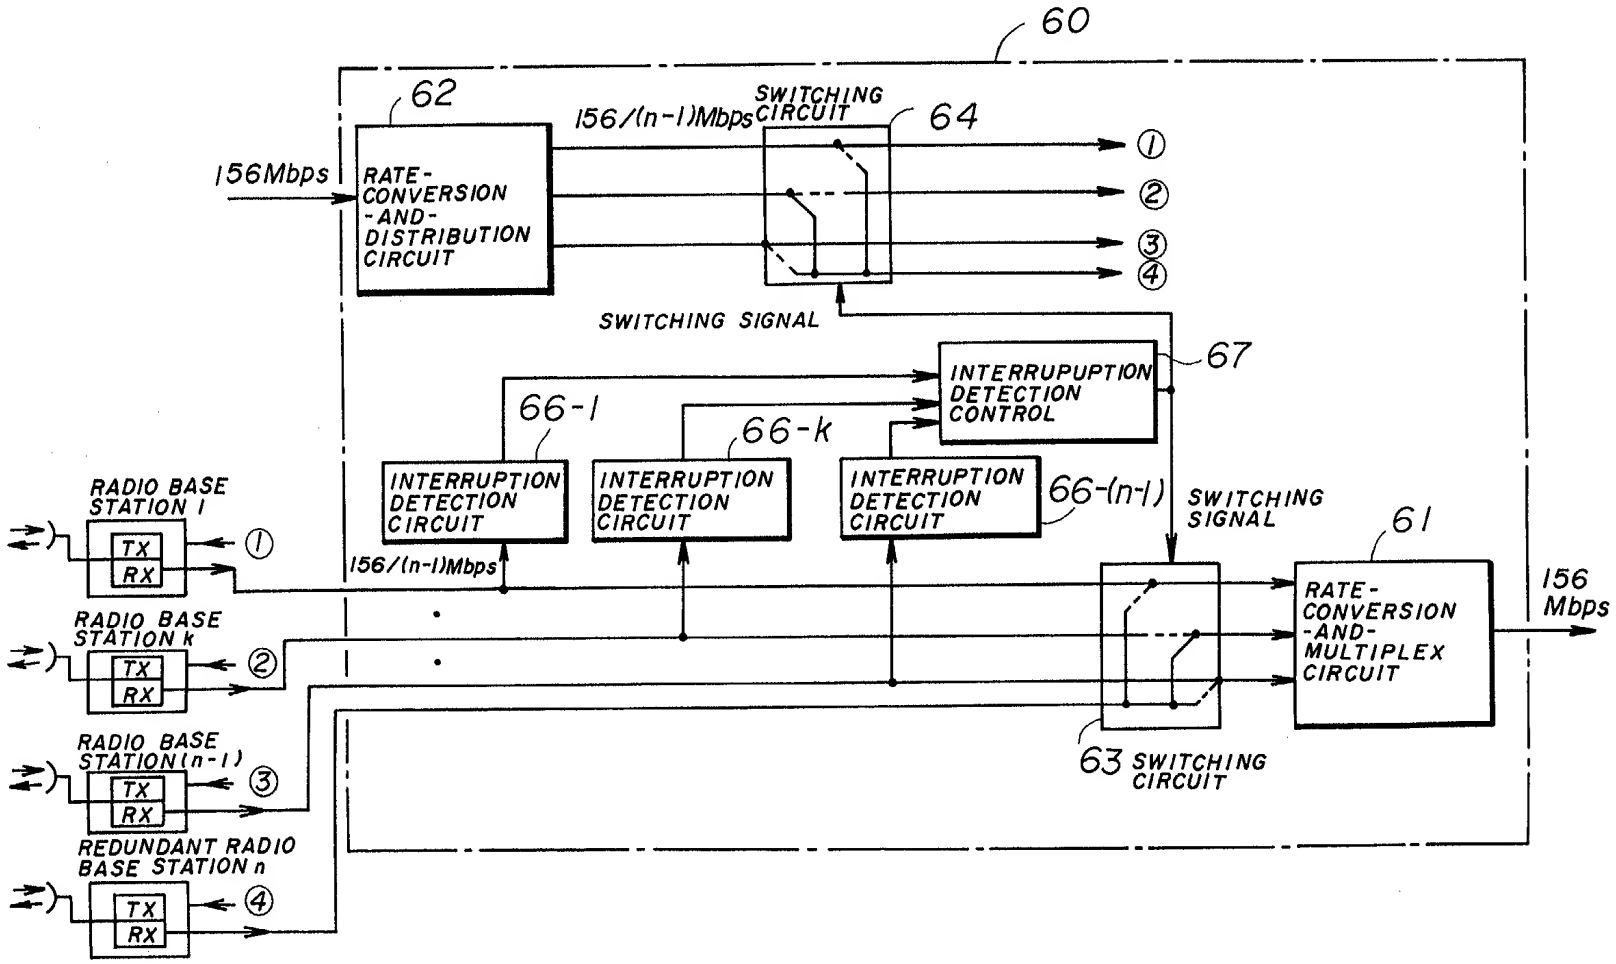
60
62
156Mbps
RATE-CONVERSION-AND-DISTRIBUTION CIRCUIT
156/(n-1)Mbps
SWITCHING CIRCUIT
64
①
②
③
④
SWITCHING SIGNAL
INTERRUPUPTION DETECTION CONTROL
67
66-1
66-k
66-(n-1)
INTERRUPTION DETECTION CIRCUIT
INTERRUPTION DETECTION CIRCUIT
INTERRUPTION DETECTION CIRCUIT
SWITCHING SIGNAL
61
RADIO BASE STATION 1
TX
RX
RADIO BASE STATION k
RADIO BASE STATION (n-1)
REDUNDANT RADIO BASE STATION n
156/(n-1)Mbps
RATE-CONVERSION-AND-MULTIPLEX CIRCUIT
156 Mbps
63 SWITCHING CIRCUIT

FIG. 12

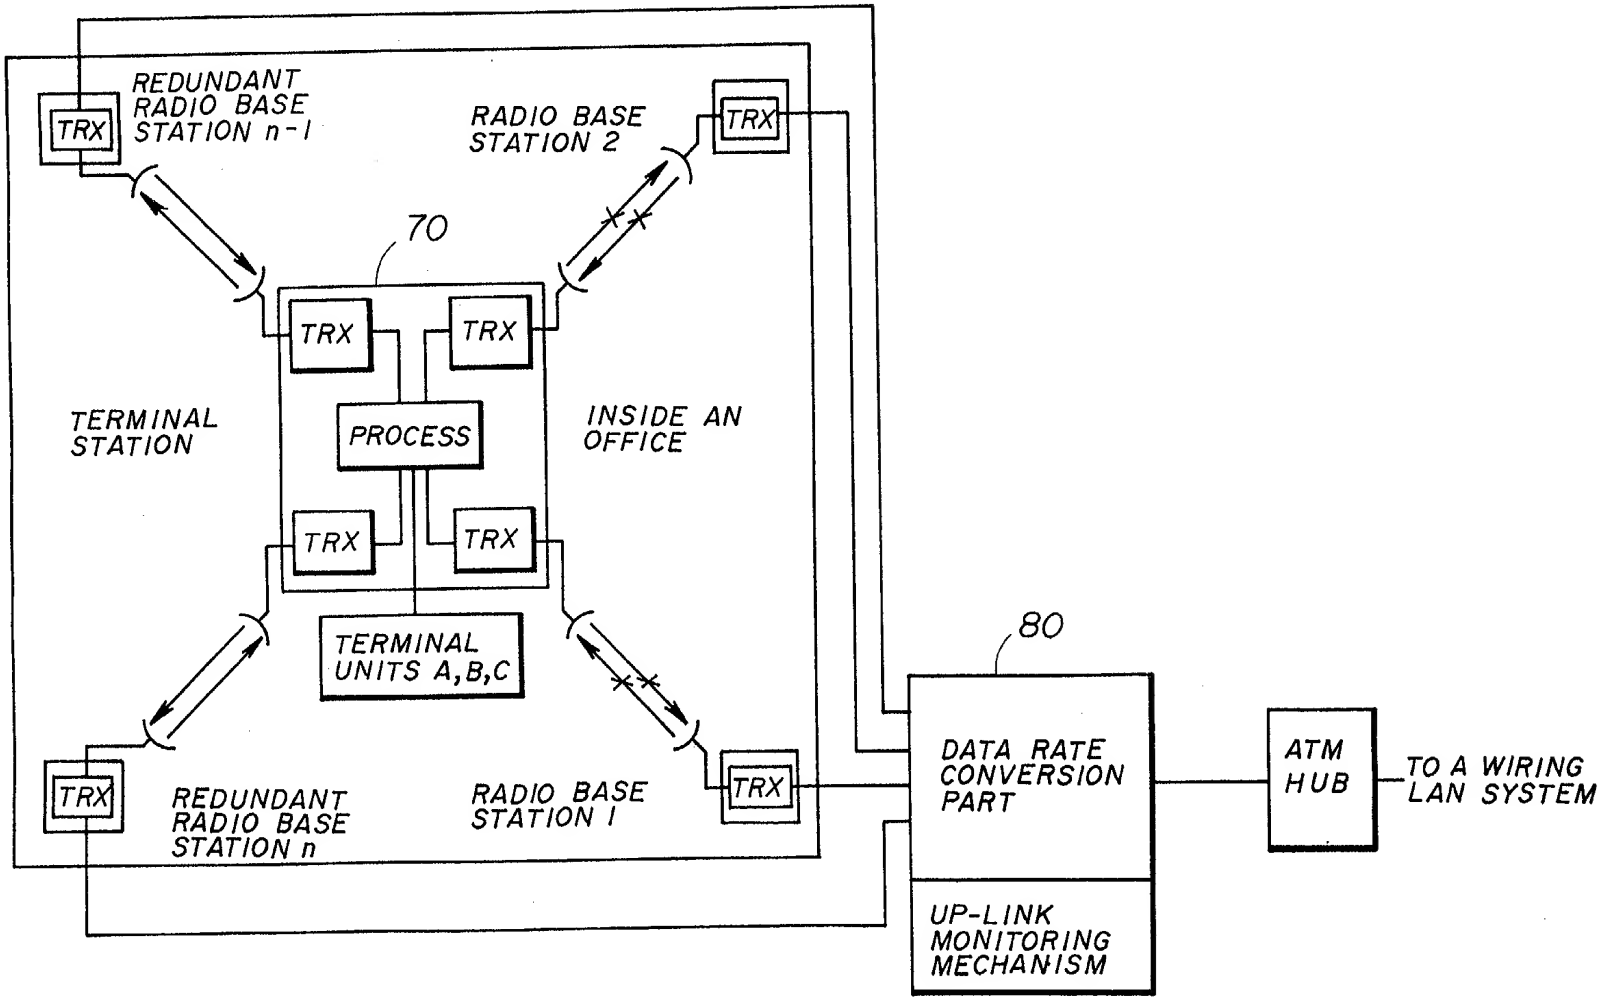
REDUNDANT RADIO BASE STATION n-1
TRX
RADIO BASE STATION 2
TRX
70
TRX
TRX
TERMINAL STATION
PROCESS
INSIDE AN OFFICE
TRX
TRX
TERMINAL UNITS A,B,C
80
DATA RATE CONVERSION PART
ATM HUB
TO A WIRING LAN SYSTEM
UP-LINK MONITORING MECHANISM
TRX
REDUNDANT RADIO BASE STATION n
RADIO BASE STATION 1
TRX

FIG. 13

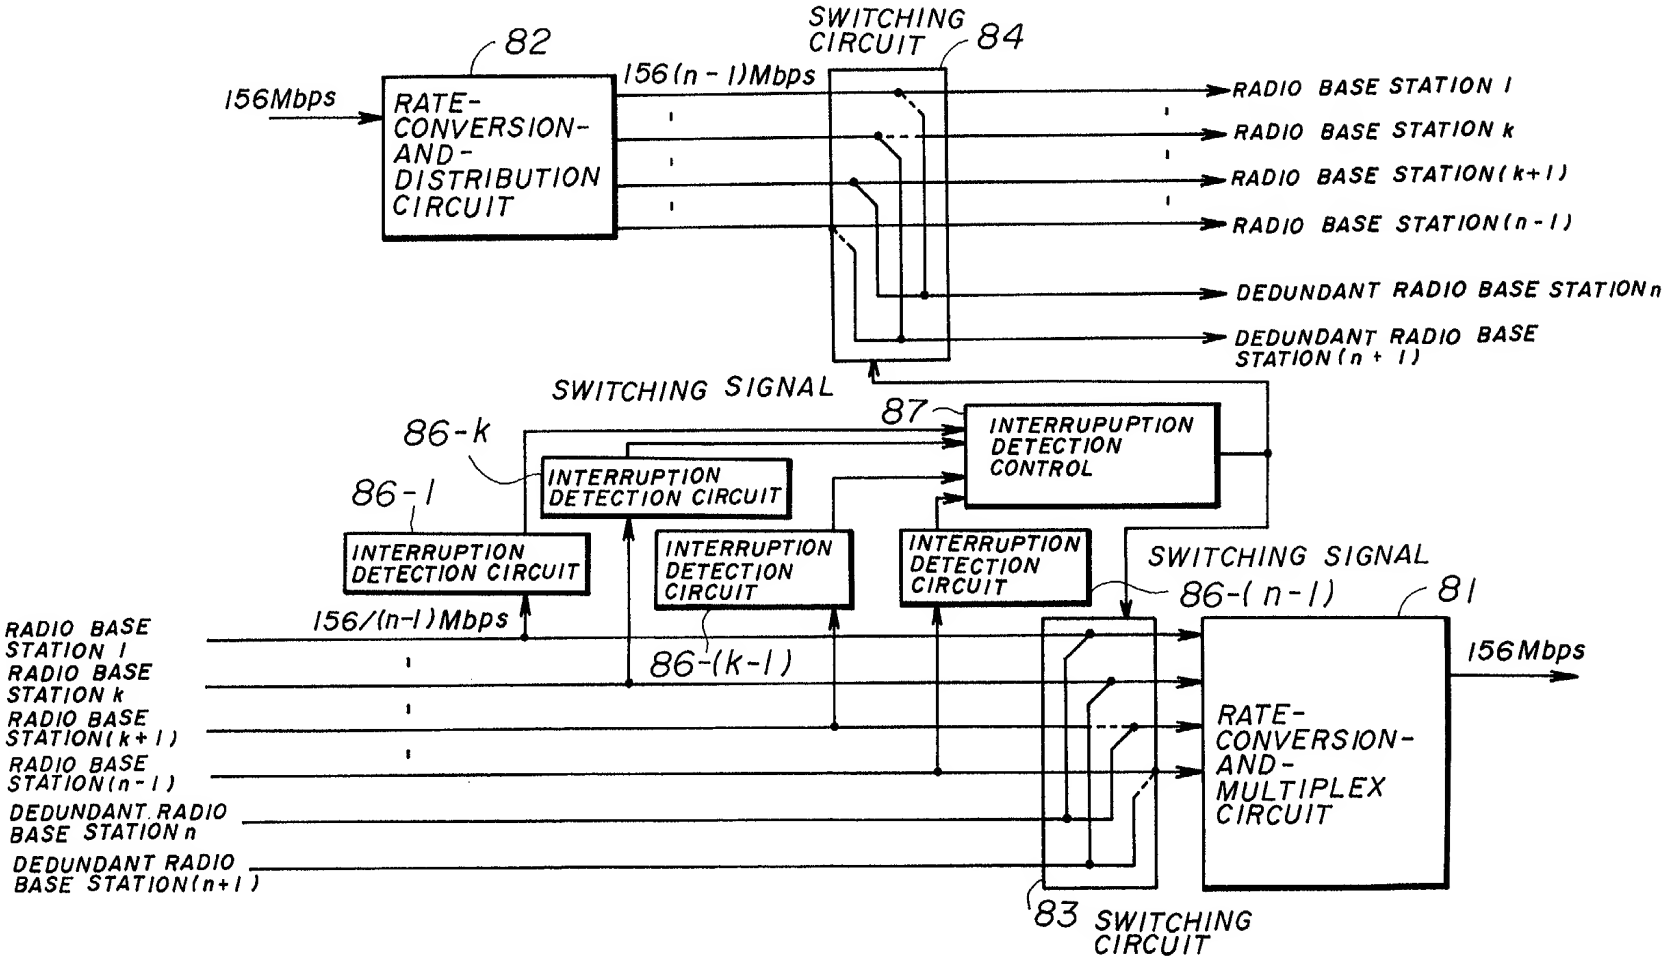
156Mbps
82
RATE-CONVERSION-AND-DISTRIBUTION CIRCUIT
156(n-1)Mbps
SWITCHING CIRCUIT
84
RADIO BASE STATION 1
RADIO BASE STATION k
RADIO BASE STATION(k+1)
RADIO BASE STATION(n-1)
DEDUNDANT RADIO BASE STATION n
DEDUNDANT RADIO BASE STATION(n+1)
SWITCHING SIGNAL
87
INTERRUPUPTION DETECTION CONTROL
86-k
INTERRUPTION DETECTION CIRCUIT
86-1
INTERRUPTION DETECTION CIRCUIT
INTERRUPTION DETECTION CIRCUIT
INTERRUPTION DETECTION CIRCUIT
SWITCHING SIGNAL
86-(n-1)
81
156/(n-1)Mbps
86-(k-1)
RADIO BASE STATION 1
RADIO BASE STATION k
RADIO BASE STATION(k+1)
RADIO BASE STATION(n-1)
DEDUNDANT RADIO BASE STATION n
DEDUNDANT RADIO BASE STATION(n+1)
156Mbps
RATE-CONVERSION-AND-MULTIPLEX CIRCUIT
83 SWITCHING CIRCUIT

S&H 3/96

UNITED STATES

Docket No.: _____

COMBINED DECLARATION/POWER OF ATTORNEY FOR UTILITY/DESIGN PATENT APPLICATION

As a below named inventor, I hereby declare that:
My residence, post office address and citizenship are as stated below next to my name. I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COMMUNICATION METHOD AND APPARATUS FOR A RADIO LOCAL AREA NETWORK SYSTEM USING MACRODIVERSITY

the specification of which (check one) [X] is attached hereto [ ] was filed on _____
as U.S. Application Serial No. _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in §1.56. I hereby claim foreign priority benefit(s) under 35 U.S.C. §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)			Priority Claimed	
Pat. Appln. No.8-189423 (Number)	Japan (Country)	18/July/1996 Day/Month/Year Filed	[X] Yes	[ ] No
(Number)	(Country)	Day/Month/Year Filed	[ ] Yes	[ ] No

I hereby claim the benefit under 35 U.S.C. §120 of any U.S. application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)
(Application Serial No.)	(Filing Date)	(Status: patented, pending, abandoned)

POWER OF ATTORNEY:

As a named inventor, I hereby appoint the following attorneys and agent: James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; James H. Marsh, Jr., 24,533; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Paul F. Daebeler, 35,852; Gene M. Garner II, 34,172; Ilene D. Altman, 36,371; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Michael Lau, 39,479; Beverly A. Pawlikowski, 36,404; John P. Kong, 40,054 and William M. Schertler, 35,348 (agent) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. Send correspondence to: STAAS & HALSEY, 700 Eleventh Street, N.W., Suite 500, Washington, D.C., 20001, and direct telephone calls to: (202) 434-1500

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Koji Arai

Inventor's Signature Koji Arai Date January 23, 1997

Residence Kawasaki-shi, Kanagawa, Japan

Citizenship Japan

Post Office Address c/o FUJITSU LIMITED, 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa, 211 Japan

Full name of second joint inventor, if any _____

Second Inventor's Signature _____ Date _____

Residence _____

Citizenship _____

Post Office Address _____